



Part Number: 00321

Engine Application: 262-400 CHEVROLET

Grind Number: SOLID FLAT TAPPET

ADVERTISED CAMSHAFT SPECIFICATIONS:

INTAKE: Duration: 274° Lift: .481 Clearance Hot: .022

EXHAUST: Duration: 282° Lift: .504 Clearance Hot: .024


The specifications listed above are based on a rocker arm ratio of 1.50 IN / 1.50 EX

RECOMMENDED VALVE SPRING INFORMATION:

Part Number:

Approximate spring valve closed: 150# LBS.

pressure: valve open: 350# LBS.

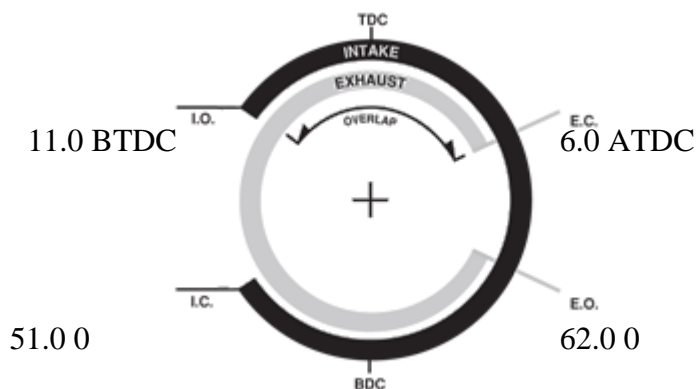

Timing Events	
The information below is for degreeing cam only. Correct only at .050" tappet lift.	
INTAKE	Opens: 11.0 0 Closes: 51.0 0
EXHAUST	Opens: 62.0 0 Closes: 6.0 0
LOBE SEPARATION 114°	
Duration at .050"	Intake: 242 Exhaust: 248
LOBE LIFT	Intake: .321 Exhaust: .336

4 degrees of advance have been ground into this Camshaft.

If using "Lobe Center" method of degreeing, cam should be installed on an intake centerline of: 110

NOTES:

Cams damaged by excessive spring pressure, over shimming, valve train bind or retainers contacting the guides are void from warranty. Refer to the "Important Camshaft and Lift Information" booklet included with each new Crower camshaft to avoid any break-in problems.