



Part Number: 16462

Engine Application: 332-428 FORD

Grind Number: 280R

ADVERTISED CAMSHAFT SPECIFICATIONS:

INTAKE: Duration: 280° Lift: .581 Clearance Hot: .026

EXHAUST: Duration: 288° Lift: .583 Clearance Hot: .028


The specifications listed above are based on a rocker arm ratio of $\frac{1.76 \text{ IN}}{1.76 \text{ EX}}$

RECOMMENDED VALVE SPRING INFORMATION:

Part Number:

Approximate spring valve closed: 200# LBS.

pressure: valve open: 650# LBS.

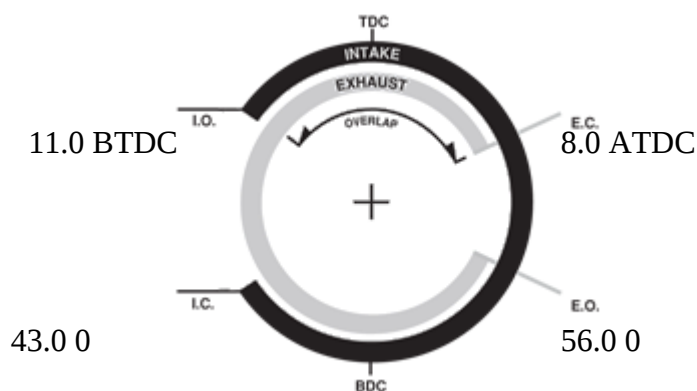

Timing Events

The information below is for degreeding cam only. Correct only at .050" tappet lift.

INTAKE	Opens: 11.0 0 Closes: 43.0 0
--------	---------------------------------

EXHAUST	Opens: 56.0 0 Closes: 8.0 0
---------	--------------------------------

LOBE SEPARATION	110°
-----------------	------

Duration at .050"	Intake: 234 Exhaust: 244
-------------------	-----------------------------

LOBE LIFT	Intake: .330 Exhaust: .331
-----------	-------------------------------

4 degrees of advance have been ground into this Camshaft.

If using "Lobe Center" method of degreeding, cam should be installed on an intake centerline of: 106

NOTES:

Cams damaged by excessive spring pressure, over shimming, valve train bind or retainers contacting the guides are void from warranty. Refer to the "Important Camshaft and Lift Information" booklet included with each new Crower camshaft to avoid any break-in problems.